

Rec'd PCT/PTO 24 JAN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number
WO 2004/010529 A1(51) International Patent Classification⁷: H01Q 1/12, 7/00(21) International Application Number:
PCT/GB2003/003260

(22) International Filing Date: 24 July 2003 (24.07.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
0217157.7 24 July 2002 (24.07.2002) GB(71) Applicant (for all designated States except US):
HARADA INDUSTRIES (EUROPE) LIMITED
[GB/GB]; Bell Heath Way, Woodgate Business Park,
Clapgate Lane, Birmingham B32 3BZ (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LEELARATNE,
Dedimuni, Rusrui, Vinodaka [LK/GB]; 55 Tunstall
Road, Canterbury, Kent CT2 7BX (GB). CALLAGHAN,Peter [GB/GB]; 2 Kilndown Gardens, Canterbury, Kent
CT2 7TY (GB). RANDALL, John [GB/GB]; 15 Charles
Drayson Court, Faversham, Kent ME13 8BB (GB).(74) Agents: MOIR, Michael, Christopher et al.; Mathys &
Squire, 100 Grays Inn Road, London WC1X 8AL (GB).(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TO).

[Continued on next page]

(54) Title: INTEGRATED LOOP ANTENNA FOR VEHICULAR APPLICATIONS

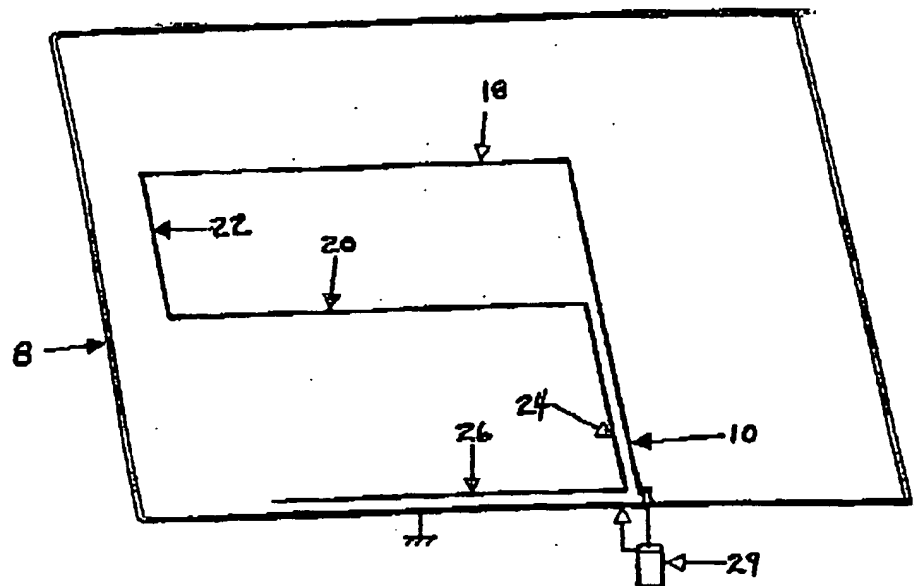

(57) Abstract: A vehicular screen antenna includes a conductor extending on a dielectric, such as a window. The conductor is configured as a loop having entry and exit segments, the loop being positioned generally centrally on the dielectric. The entry and exit segments extend proximate each other from the loop towards a first edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fixed to a vehicle.

Best Available Copy

WO 2004/010529 A1

WO 2004/010529 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2004/010529

5/PRTS

10/522220

CT/GB2003/003260

DT01 Rec'd PCT/PTC 24 JAN 2005

1

INTEGRATED LOOP ANTENNA FOR VEHICULAR APPLICATIONS

BACKGROUND OF THE INVENTION

The present invention relates to a vehicular antenna system and, more particularly, to a system that includes a configuration for a loop antenna which enhances reception performance.

Antennas integrated into parts of a vehicle are known. One approach is to use the de-misting heater grid on the rear screen as part of the antenna; see Japanese Patent Application No. 13/22005. Such an arrangement may be used with a separate element for AM reception; see EP Patent Application No. 0 155 647.

Some vehicles provide a suitable dielectric surface onto which a dedicated antenna element pattern can be formed. One example is the rear quarter window on a station wagon (estate car). Such windows are fixed, which allows the printing of a suitable antenna pattern. For example, the use of separate patterns to provide FM and AM radio reception was proposed in US Patent 3,771, 159. Combining a pattern on a side window with elements on other windows to improve pattern coverage was proposed in EP Application No. 0 854 533.

A major problem with implementation of an antenna element on a rear quarter window of a vehicle is polarisation. Often the signal feedline needs to connect to the bottom of the window because of space limitations at the top and sides of the window frame. This means that the

WO 2004/010529

PCT/GB2003/003260

2

primary antenna currents are extending vertically, and there then exists correspondingly less horizontal polarisation ("horizontal polarisation" here signifying the horizontally-polarized component of the antenna signal). This causes problems for markets where broadcast signals are predominantly horizontally-polarised.

SUMMARY OF THE INVENTION

The present invention is a loop-type screen antenna that at least in its preferred embodiments is intended to address the foregoing problems.

A vehicular screen antenna of the invention is adapted to be fitted to a vehicle so as to extend generally vertically, and includes a conductor extending on a dielectric. The conductor is configured as a loop having entry and exit segments that extend proximate each other from the loop towards an edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fitted to a vehicle. During use of the antenna, a horizontally-polarized component of a linearly-polarized signal on the antenna has a magnitude at least approximating that of a vertically-polarized component of the signal. The words "generally vertically" are intended to be interpreted broadly herein to mean "at a substantial angle to the horizontal".

Preferably, the entry and exit segments join the loop proximate each other and a corner of the loop.

WO 2004/010529

GB2003/003260

3

Preferably, when the dielectric is fitted to the vehicle, the first edge of the dielectric is a bottom edge. In such arrangement, the entry and exit segments may join the loop proximate each other and a corner of the loop.

Preferably, the dielectric is a window of the vehicle.

In a first embodiment, at the first edge of the dielectric the entry segment may be adapted to connect to a feedline, and the exit segment adapted to connect to vehicle ground.

In a second embodiment, at the first edge of the dielectric the entry segment may be adapted to connect to a feedline, and the exit segment to connect to a stub segment that extends generally parallel to the first edge of the dielectric for capacitive coupling to vehicle ground. In this embodiment, the stub segment may be adapted to be separated less than approximately 5mm from a vehicle ground surface proximate the first edge of the dielectric. The length of the stub segment and its separation distance from the vehicle ground surface may be selected such that the stub segment is able to receive low-frequency broadcast signals (LW/MW/SW) typically described as "AM" (below 6 MHz).

In a third embodiment, at the first edge of the dielectric the entry segment may be adapted to connect to a feedline, and the exit segment to connect to one end of resonator circuitry the other end of which connects to

WO 2004/010529

PCT/GB2003/003260

4

vehicle ground. The resonator circuitry may be formed by a discrete electronic circuit that includes an inductor means and a capacitor means connected in series. The resonator circuitry may also include a tuning means.

5 Preferably, the antenna includes a switch means for disconnecting the exit segment from a signal ground and connecting it instead to the entry segment.

The loop may have a generally rectilinear configuration. Preferably, the loop is generally configured as a
10 rectangle having its longer sides extending generally horizontally when the dielectric is fitted to the vehicle. More preferably, when the dielectric is fitted to the vehicle, the loop is extends at between approximately 50mm and approximately 100mm from the edges of the
15 dielectric.

The loop may be positioned generally centrally on the dielectric.

Preferably, the dielectric is a rear window or a rear quarter window of a station wagon. More preferably,
20 a signal feedline connectable to the entry segment is positioned on the body of the vehicle so as to be below a body aperture adapted to receive the respective rear window or rear quarter window and so as to be proximate a corner of the vehicle body.

25 The antenna of the subject invention is what is known in the art as an "electrically small" antenna, meaning that the operative length of the antenna is less than one-half wavelength of received signals. The

WO 2004/010529

GB2003/003260

5

antenna of the preferred embodiments of the invention is particularly intended for broadcast frequency-modulated ("FM") signal reception, and more generally for handling signals with wavelengths 5 to 10 times the operative antenna length, which brings this antenna well within the classification of an electrically-small antenna. Electrically-small antennas are adapted to receive or transmit signals having vertical and/or horizontal polarization rather than circularly-polarized signals.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Preferred features of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:-

15 Figure 1 illustrates a pattern of a first conventional screen antenna;

Figure 2 illustrates a pattern of a second conventional screen antenna, and current flow in the antenna;

20 Figure 3 illustrates a first embodiment of a screen antenna of this invention, the antenna including a stub ground element for a coupled ground connection;

Figure 4 illustrates current flow in the first embodiment of the screen antenna of this invention;

25 Figure 5 illustrates a second embodiment of the screen antenna of this invention, the antenna including resonator circuitry at the ground connection;

Figure 6 illustrates a third embodiment of the screen antenna of this invention, the antenna having a

WO 2004/010529

CT/GB2003/003260

6

direct ground connection and no stub ground element;

Figure 7 is a graph comparing return loss for the loop antenna of Figure 3 (coupled ground connection) and the loop antenna of Figure 6 (direct ground connection);

5 Figure 8 is a graph comparing the sensitivity of a loop antenna with that of a rod antenna for AM signal reception; and,

Figures 9(a) and 9(b) are polar diagrams illustrating vertically-polarised and horizontally-polarised VHF
10 signal reception, respectively, for the antenna element of the subject invention in comparison to a conventional antenna element.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

One conventional type of screen antenna has an
15 antenna element formed on a dielectric surface in an aperture of a vehicle body, as illustrated in Figure 1. The dielectric is normally a window. The antenna element is a simple monopole-type, fed at its base. The antenna currents are split equally between the antenna element
20 and the car body. When such an antenna element is used on a rear quarter window, greatest-magnitude currents flow mainly vertically, resulting in an antenna with predominantly-vertical polarisation.

Another conventional type of screen antenna has an
25 antenna element formed on a surface of a dielectric 8, as illustrated in Figure 2. In this case, a vertical feed wire 10 extends upward from a feed connection point 12

WO 2004/010529

GB2003/003260

7

with a signal feedline 14 on the vehicle body to form one end of a closed loop generally designated 16. The loop 16 further consists of a pair of generally-parallel horizontal wires 18 and 20, and a vertical wire 22 forming the other end of loop 16. This can operate at VHF frequencies and can also provide an AM element; however, the VHF performance for horizontal polarisation is not good. This is because this configuration can be considered equivalent to a simple L-shaped element having a vertical segment connecting to a horizontal segment that extends to the left, with the left end being an open free end. The current diminishes toward the free end, and as such, the currents 18A and 20A along the horizontal wires 18 and 20 are small compared with the current 10A on the vertical feed wire 10; poor horizontal polarisation is the result.

Comparing the conventional structure of Figure 2 with the loop arrangement of the subject invention shown in Figure 3, it can be seen that the invention consists of opening the loop and adding to lower horizontal wire 20 another vertical wire 24 that is closely spaced to feed wire 10. The wire 24 in one embodiment of the invention connects to a stub antenna element 26 extending along the edge of the window, less than 5mm from the vehicle body. The length of the stub antenna element 26 is adjusted to give a low impedance at the feed point and at the centre frequency of the VHF band of interest. An unbalanced transmission line 28, such as formed by a

WO 2004/010529

T/GB2003/003260

8

coaxial cable 29, feeds the antenna as shown in Figure 3. The stub antenna element 26 is isolated from the rest of the antenna at low frequencies, enabling its use as an AM antenna (where "AM" here connotes low-frequency broadcast signals (LW/MW/SW) having a frequency below approximately 6 MHz) -

Although the elements of the antenna loop have been described as being essentially horizontal and vertical, they might be angled for styling without major detriment. The antenna loop should be spaced away from the vehicle body to reduce excessive capacitive loading, yet be made as large as possible to increase bandwidth and reduce impedance. The separation between loop and car body needs to be optimized for each application, but is typically 50mm to 100mm.

Typical resulting currents are shown in Figure 4. The current 18B along the wire 18 is much greater than the current 18A of the closed loop of Figure 2, with a resultant increase in horizontal polarisation. As in Figure 2, the current diminishes with distance from signal feedline 14; however, the distance has now been increased by introducing a return path to ground. Currents 10B and 18B are of comparable magnitude, but are each larger than the currents 22B, 20B and 24B on the respective return wires 22, 20 and 24.

The excitation current of the loop element of the invention is actually a combination of two current modes. The first current mode is the "odd" mode, which is

GB2004/003260

WO 2004/010529

9

similar to the conventional element of Figure 2, in which the return current to ground is zero. The second current mode is an "even" mode, whereby the current returning to ground connection point 26 is equal to the feed current. The net effect is a combination of two modes, and the combination will depend upon the physical structure and upon the wavelength of operation. Additionally, radiation also depends upon the "image" currents that flow in the body of the vehicle, close to connection point 12; however, such image currents are determined by the current structure on the element. The image currents 30 in the conventional case shown in Figure 2 are essentially vertical, whereas the image currents 32 for the loop antenna of the subject invention, shown in Figure 4, have a more two-dimensional nature, i.e. both horizontal and vertical.

A second embodiment of the invention is illustrated in Figure 5. In this embodiment, the stub antenna 26 is not present, and the end of vertical wire 24 is connected to ground through a discrete series resonant circuit. The circuit is illustrated in Figure 5 by an inductor L connected in series with a capacitor C, but any resonator element with similar properties might be used. This configuration maintains the VHF performance but also allows AM reception, i.e. the resonator element gives an 'open circuit' at AM. The discrete series resonant circuit might include circuitry to allow variable tuning for wider bandwidth.

WO 2004/010529

T/GB2003/003260

10

If AM reception is not required, then stub antenna element 26 is not present. This is a third embodiment of the invention, illustrated in Figure 6, in which a direct connection is made between return line 24 and a ground connection point 34 on the vehicle body, proximate to the feed connection point 12. This embodiment (as well as the other two) may include an electronic switch 36 (shown schematically in Fig. 6) for connecting return wire 24 with the feed line rather than the ground line. After such switching, the antenna operates in a similar way to the L-shaped antenna shown in Fig. 2. Thus, the inclusion of the switch 36 allows a switched performance for polarisation diversity, i.e. reducing the horizontal polarisation while maintaining the vertical polarisation.

It has been found that if the loop antenna of the invention is placed in the rear quarter window of a car, improved omni-directionality can be obtained by placing the feed point to the rear. Horizontal components of the ground current can then flow onto the rear of the vehicle body, below the window, and these enhance the horizontal component in the plane orthogonal to the window, thereby achieving good omni-directionality for both horizontal and vertical polarisation.

Practically, the length of the antenna element on the dielectric is less than a wavelength, i.e. is less than the resonant length. This translates to a narrower bandwidth, as illustrated in the return loss graph of Figure 7; it is, however, wide enough for typical FM

GB2003/003260

WO 2004/010529

11

reception bandwidths, although some additional matching may be needed. The effect of using a coupled ground (stub antenna element 26 is present) is shown compared with using a direct ground. It can be seen that the stub antenna element performs well, with similar characteristics to the direct ground connection (a small amount of detuning is caused by the reactance of the stub). This is illustrated in Figure 8, using a high-impedance amplifier to buffer the element. The coupled ground can be optimized to tune the VHF receive band and to minimize the capacitive loading for AM reception.

Figures 9(a) and 9(b) illustrate typical polar diagrams for screen antennas printed on the rear quarter window of a station wagon. Measurement is made at 98 MHz for both vertical and horizontal polarisations, using the proposed loop element of Figure 3 against the conventional loop element of Figure 2. An active matching circuit was used in both instances, providing around 5 dB of gain to each antenna (with received levels recorded in dBi). As expected, in the vertical plane the new open-loop element performs similarly to a conventional closed-loop element. However, for the horizontal plane the conventional closed-loop element is seen to have a poor horizontal component, while the new open-loop element is more omni-directional and provides greater horizontally-polarised gain, comparable to gain in the vertical plane.

While the present invention has been described in its preferred embodiments, it is to be understood that

WO 2004/010529

T/GB2003/003260

12

the words which have been used are words of description rather than limitation, and that changes may be made to the invention without departing from its scope as defined by the appended claims.

5 Each feature disclosed in this specification (which term includes the claims) and/or shown in the drawings may be incorporated in the invention independently of other disclosed and/or illustrated features.

10 The text of the abstract filed herewith is repeated here as part of the specification.

15 A vehicular screen antenna includes a conductor extending on a dielectric, such as a window. The conductor is configured as a loop having entry and exit segments, the loop being positioned generally centrally on the dielectric. The entry and exit segments extend proximate each other from the loop towards a first edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fitted to a vehicle.

WO 2004/010529

/GB2003/003260

13

CLAIMS:

1. A vehicular screen antenna adapted to be fitted to a vehicle so as to extend generally vertically, the antenna comprising a conductor extending on a dielectric, the conductor being configured as a loop having entry and exit segments that extend proximate each other from the loop towards an edge of the dielectric and are oriented on the dielectric so as to extend generally vertically when the dielectric is fitted to the vehicle, wherein during use of the antenna, a horizontally-polarized component of a linearly-polarized signal on the antenna has a magnitude at least approximating that of a vertically-polarized component of the signal.

2. The screen antenna as in claim 1, wherein the entry and exit segments join the loop proximate each other and proximate a corner of the loop.

3. The screen antenna as in claim 1, wherein, when the dielectric is fitted to the vehicle, the said edge of the dielectric is a bottom edge.

4. The screen antenna as in claim 2, wherein, when the dielectric is fitted to the vehicle, the said edge of the dielectric is a bottom edge, and the corner of the loop is a bottom corner.

WO 2004/010529

/GB2003/003260

14

5. The screen antenna as in any preceding claim, wherein the dielectric is a window of the vehicle.

6. The screen antenna as in any preceding claim, wherein at the said edge of the dielectric the entry segment is adapted to connect to a feedline, and the exit segment is adapted to connect to vehicle ground.

7. The screen antenna as in any one of claims 1 to 5, wherein at the said edge of the dielectric the entry segment is adapted to connect to a feedline, and the exit segment connects to a stub segment that extends generally parallel to the first edge of the dielectric for capacitive coupling to vehicle ground.

8. The screen antenna as in claim 7, wherein the stub segment is adapted to extend with separation distance less than approximately 5mm from a vehicle ground surface proximate the said edge of the dielectric.

9. The screen antenna as in claim 8, wherein the length of the stub segment and its separation distance from the vehicle ground surface are selected such that the stub segment is able to receive low-frequency broadcast signals.

10. The screen antenna as in any one of claims 1 to 5, wherein at the said edge of the dielectric the entry

WO 2004/010529

/GB2003/003260

15

segment is adapted to connect to a feedline, and the exit segment is adapted to connect to one end of resonator circuitry the other end of which connects to vehicle ground.

11. The screen antenna as in claim 10, wherein the resonator circuitry is a discrete electronic circuit comprising an inductor means and a capacitor means connected in series.

12. The screen antenna as in claim 10 or 11, wherein the resonator circuitry also includes a tuning means.

13. The screen antenna as in any preceding claim, wherein the antenna also comprises a switch means for disconnecting the exit segment from a signal ground and connecting it instead to the entry segment.

14. The screen antenna as in any preceding claim, wherein the loop has a generally rectilinear configuration.

15. The screen antenna as in any preceding claim, wherein the loop is generally configured as a rectangle having its longer sides extending generally horizontally when the dielectric is fitted to the vehicle.

WO 2004/010529

GB2003/003260

16

16. The screen antenna as in any preceding claim, wherein, when the dielectric is fitted to the vehicle, the loop extends at between approximately 50mm and approximately 100mm from the edges of the dielectric.

17. The screen antenna as in any preceding claim, wherein the loop is positioned generally centrally on the dielectric.

18. The screen antenna as in any preceding claim, wherein the dielectric is a rear window or rear quarter window of a station-wagon type of vehicle.

19. The screen antenna as in claim 17, wherein a signal feedline connectable to the entry segment is positioned on the body of the vehicle so as to be below a body aperture adapted to receive the respective rear window or rear quarter window and so as to be proximate a corner of the vehicle body.

WO 2004/010529

T/GB2003/003260

10/522220

1/5

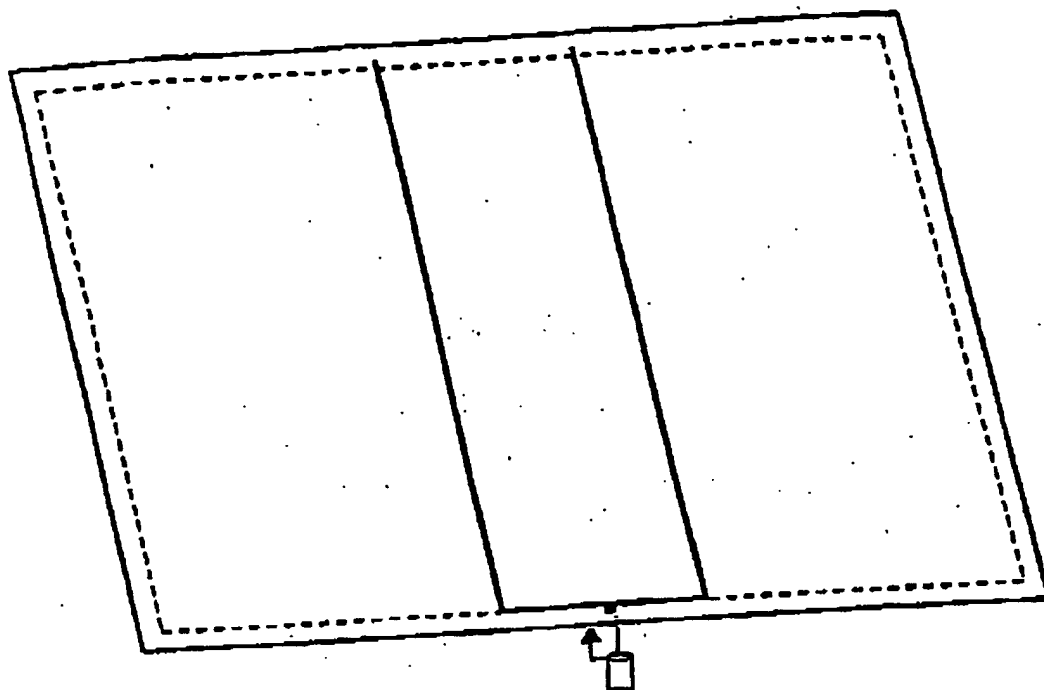


FIGURE 1

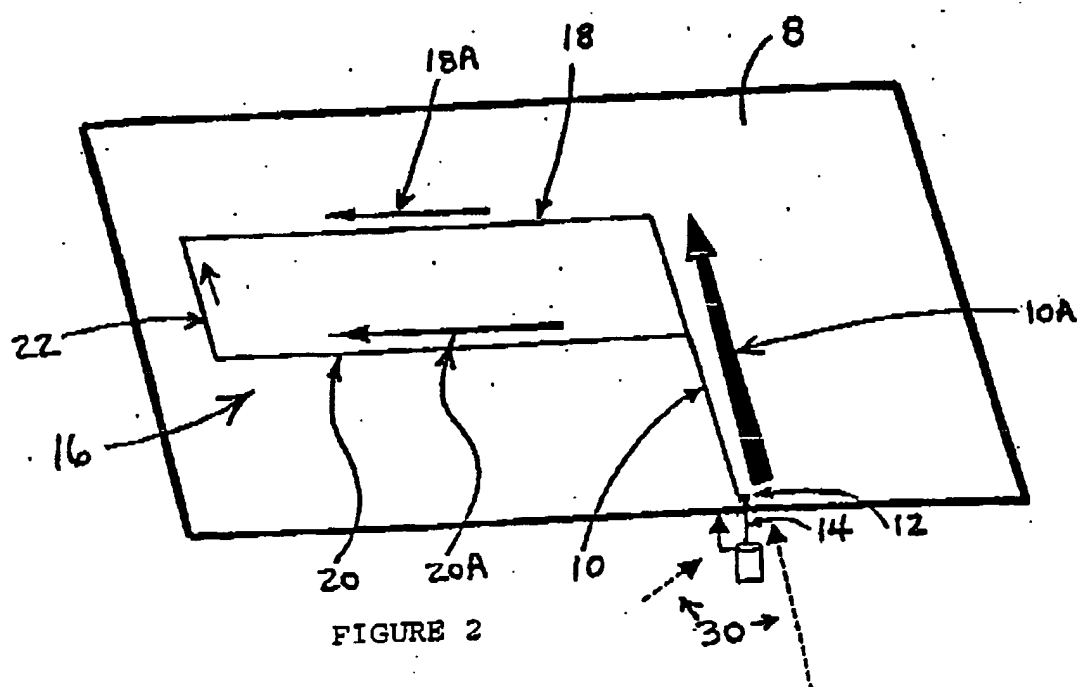


FIGURE 2

WO 2004/010529

T/GB2003/003260

10/522220

2/5

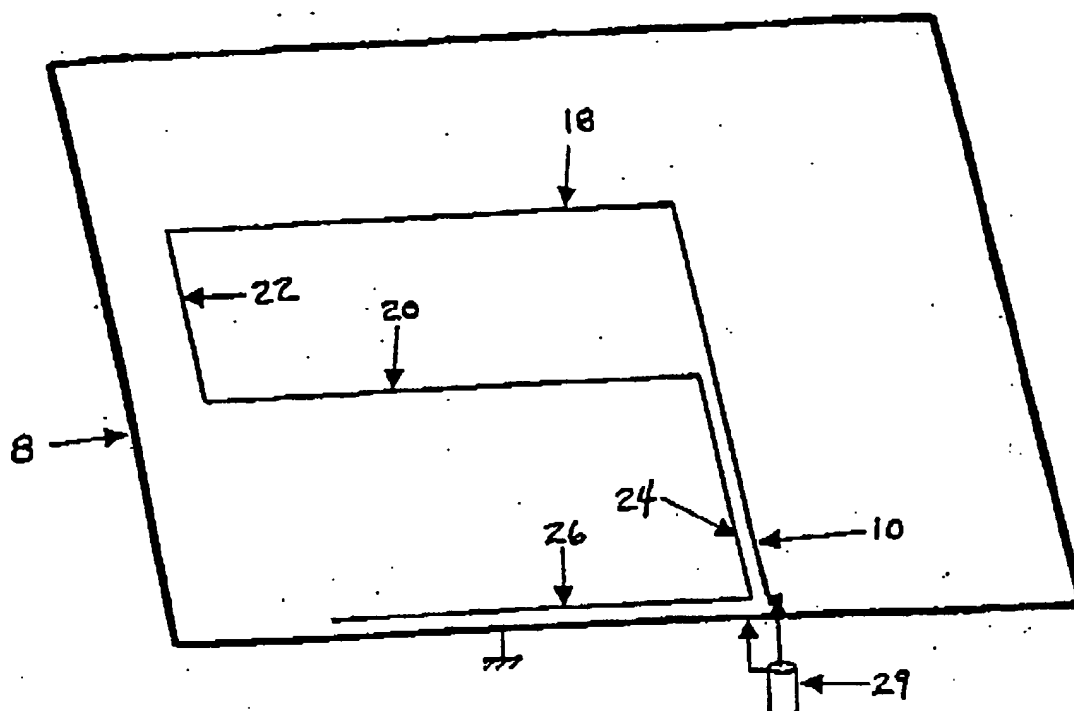


FIGURE 3

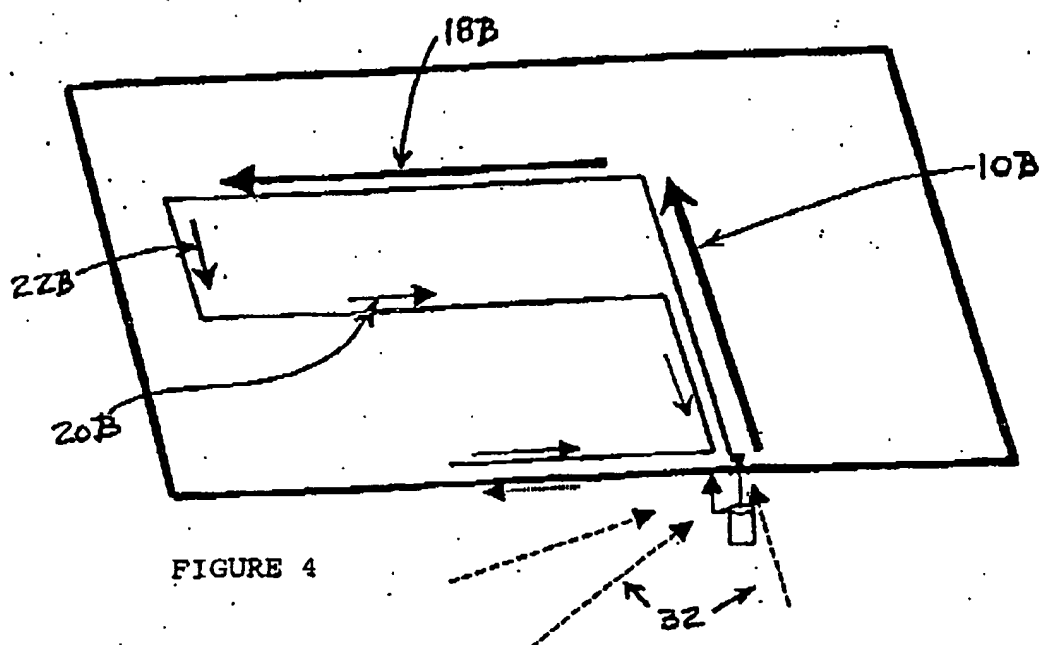


FIGURE 4

WO 2004/010529

T/GB2003/003260

10/522220

3/5

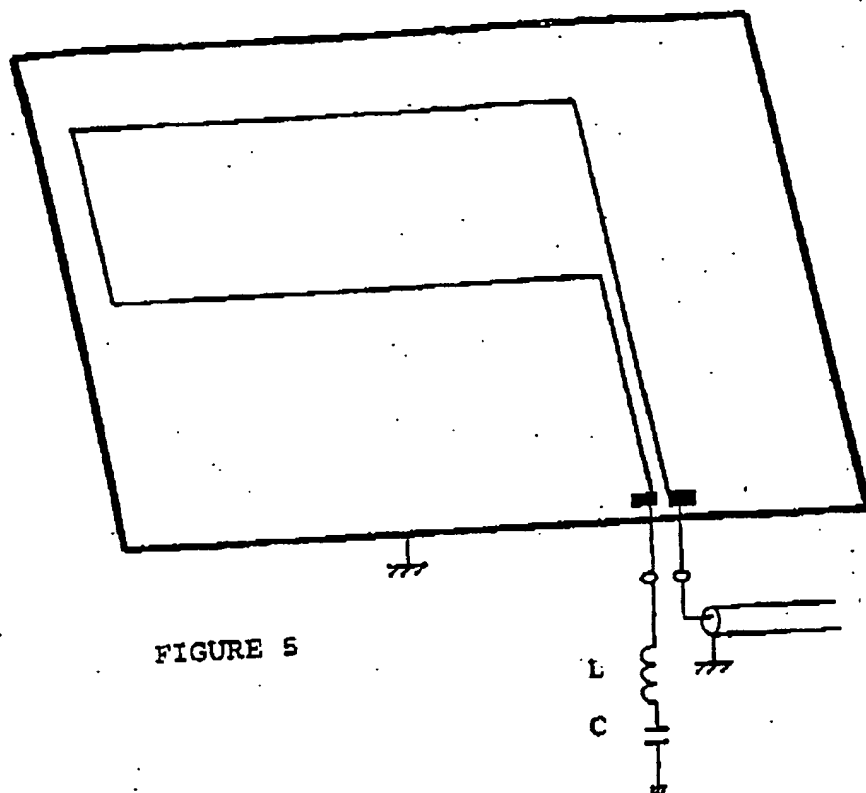


FIGURE 5

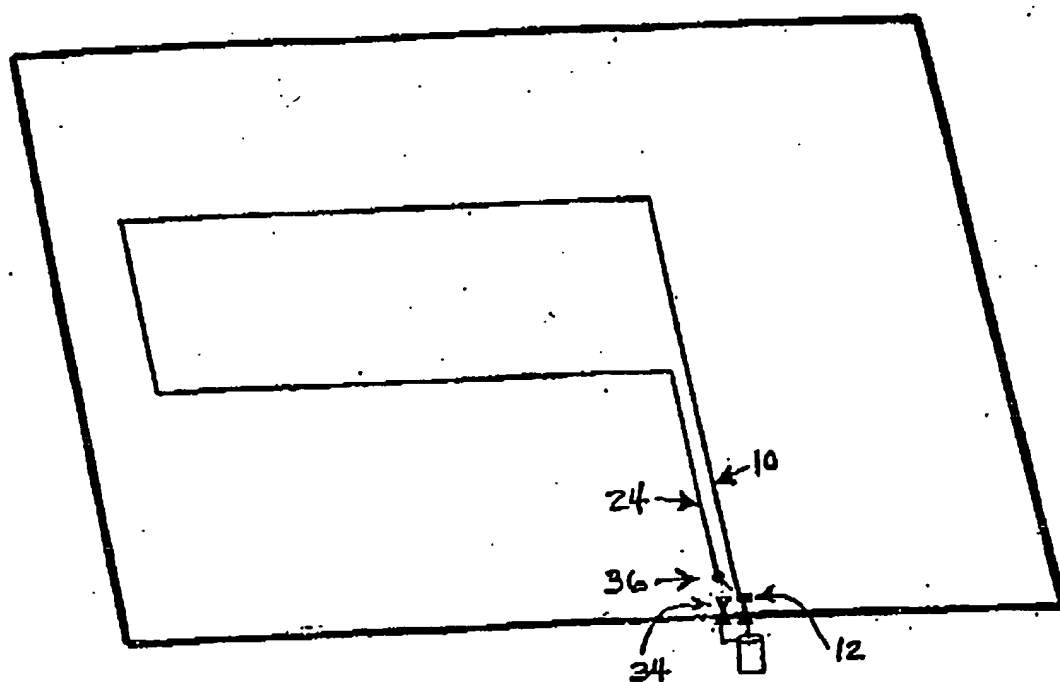


FIGURE 6

WO 2004/010529

CT/GB2003/003260

10/522220

4/5

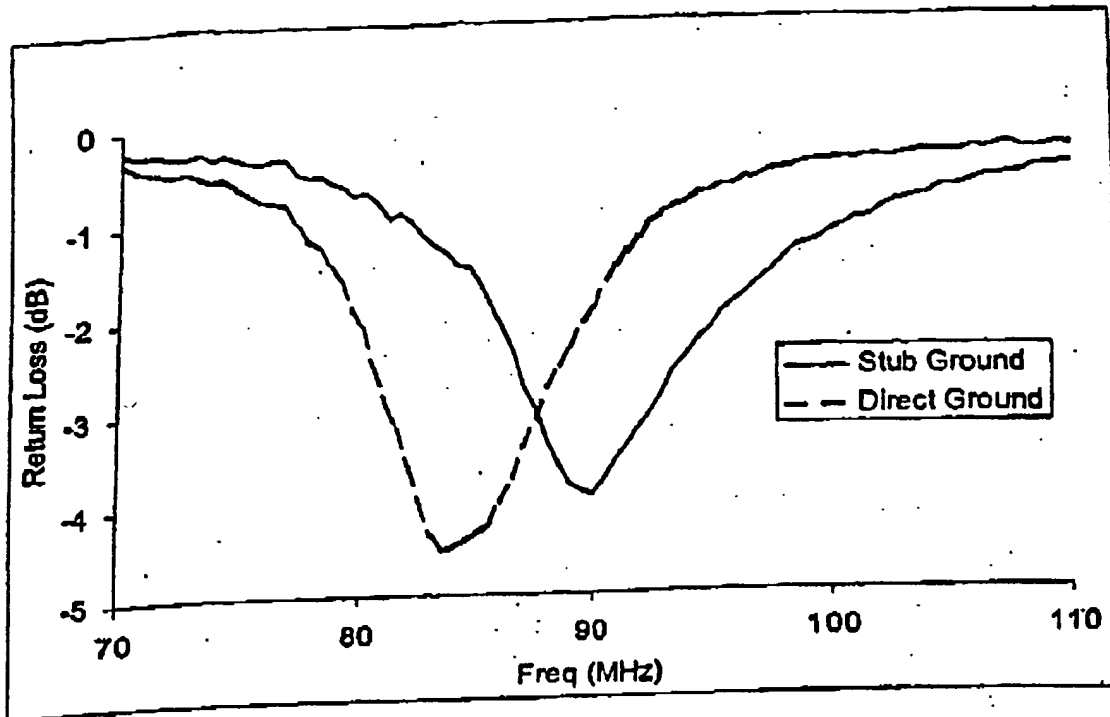


FIGURE 7

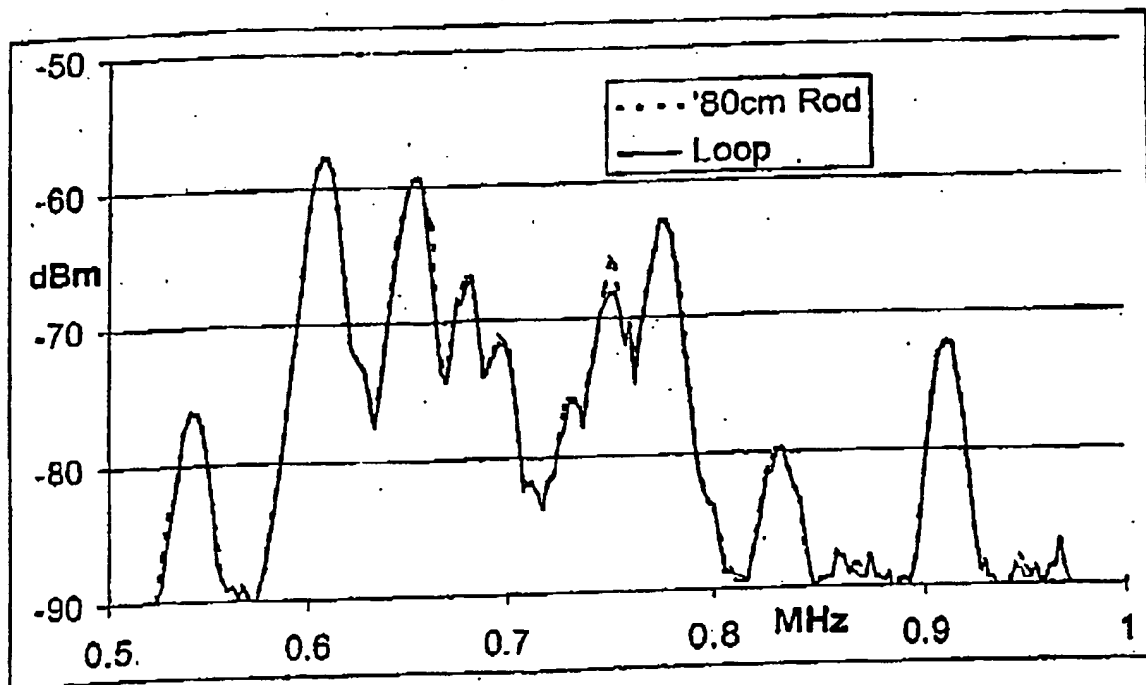


FIGURE 8

WO 2004/010529

T/GB2003/803260

10/522220

5/5

VERTICAL


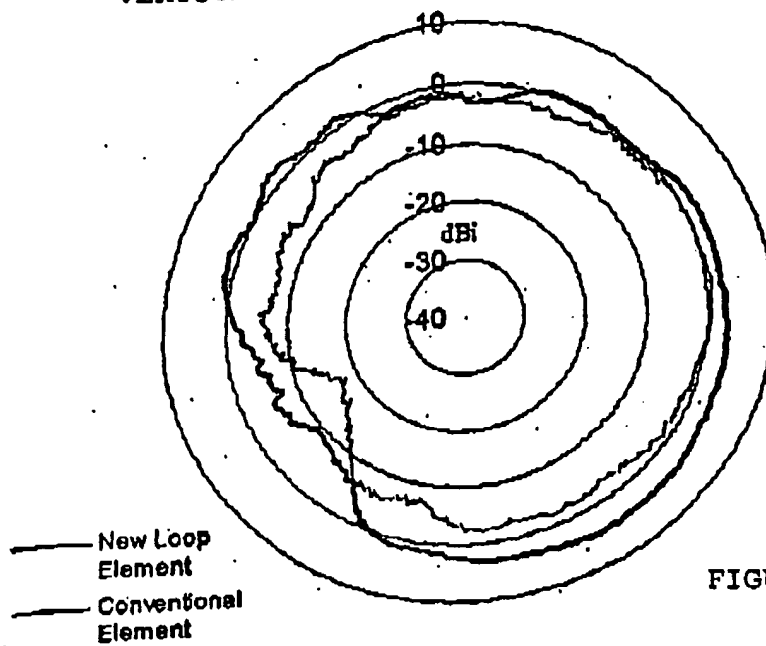


FIGURE 9(a)

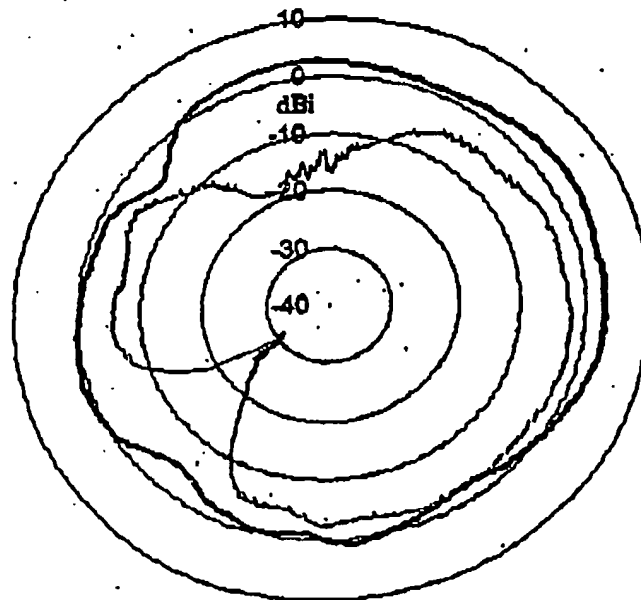

HORIZONTAL

FIGURE 9(b)

INTERNATIONAL SEARCH REPORT

 Internation No
 PCT/GB 03/03260

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01Q1/12 H01Q7/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 160 518 A (SHIBATA NAOKI ET AL) 12 December 2000 (2000-12-12) abstract; figure 2	1-6, 14-16 18,19 10-12
X	figure 5	
X	EP 0 806 808 A (HARADA IND CO LTD) 12 November 1997 (1997-11-12) page 4, line 42,43	1-6, 14-16 18,19
Y		18,19
Y	EP 0 854 533 A (FORD MOTOR CO) 22 July 1998 (1998-07-22) figure 1	
X	US 5 565 876 A (MURAKAMI HARUNORI ET AL) 15 October 1996 (1996-10-15) the whole document	1-5, 14, 15,17

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claims or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *Z* document member of the same patent family

Date of the actual completion of the international search

6 October 2003

Date of mailing of the international search report

27/10/2003

Name and mailing address of the ISA

 European Patent Office, P.O. 5018 Patentplan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl
 Fax (+31-70) 340-3018

Authorized officer

Marot-Lassauzate, J

INTERNATIONAL SEARCH REPORT

in) ation on patent family members

Internati on No

PCT/ub u3/03260

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6160518	A	12-12-2000	JP 2000307321 A	02-11-2000
EP 0806808	A	12-11-1997	JP 9298413 A	18-11-1997
			EP 0806808 A2	12-11-1997
			US 5949381 A	07-09-1999
EP 0854533	A	22-07-1998	US 5883599 A	16-03-1999
			DE 69702591 D1	24-08-2000
			DE 69702591 T2	19-04-2001
			EP 0854533 A1	22-07-1998
			JP 10209731 A	07-08-1998
US 5565876	A	15-10-1996	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.